


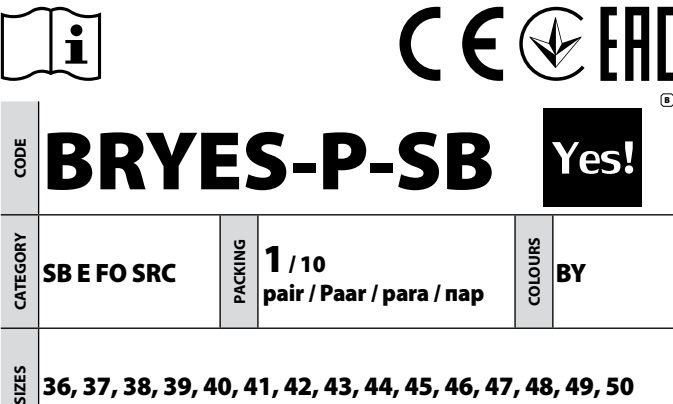

EN Instruction for use

DE Gebrauchsanweisung

PL Instrukcja użytkowania

RU Инструкция по применению

UA Інструкція для користування

RO Instrucțiuni de utilizare

LT Naudojimo instrukcija

support.rawpol.com for other languages

SK LV EE BY BG MD SI ES AT NL FR DA PT IT SE FI NO TR GR CZ HR IS HU

PRODUCT NAME:

Safety shoes

Sicherheitsschuhe

Buty bezpieczne

Безопасная обувь

Безпечне взуття

Incălțăminte de siguranță

Saugi avalynė

WWW.SUPPORT.RAWPOL.COM

EN ISO 20345:2011

STANDARDS

The explanation of pictograms / standards is in the text of the instruction - Erklärung der Piktogramme / Standards finden Sie im Text des Handbuchs - Wyjaśnienie piktogramów / norm znajduje się w tekście instrukcji - Обьяснение пиктограмм / стандартів содержится в тексте инструкции



v. CSNF:109

verwendet werden, die die Schuhoberfläche schädigen könnten. Nach der Säuberung trocken und erst danach die Schuhhaltung durchführen. Durchnässe Schuhe sollten bei Zimmertemperatur (nicht in der Nähe von Öfen und Heizkörpern) ungefähr 18 Stunden getrocknet werden. Aus das getrocknete Oberflächen und anderen Materialien hergestellten Produkte dürfen nicht mit einem für diesen Zweck bestimmten Tuch oder einem stark gewelltem feuchten Tuch und mit Aerosolentwurmungsmitteln gereinigt werden, die für die entsprechende Lederart und andere Außenmaterialien bestimmt sind. Nach Arbeitsende sollten die Schuhe jedes Mal konserviert werden, was eine langfristige Nutzung gewährleistet. Qualitätsreklamationen bei Schuhen, die nicht konserviert wurden oder eine natürliche Abnutzung aufweisen, werden nicht berücksichtigt. Es wird empfohlen, handelsübliche Reinigungs- und Pflegemittel für die jeweilige Materialart zu verwenden, die sich nicht negativ auf die Schuhe auswirken. Es wird empfohlen, zusätzliche Desinfektionsmethoden und Desinfektionsmittel zu verwenden, da sich dies auf die Verminderung des Schutzniveaus auswirken kann.

Lebensdauer: Dies kann basierend auf dem Schuhzustand beurteilt werden. Aufgrund der unterschiedlichen Intensität der Nutzung und der Umweltumfisse sowie Sonnenlicht, Regen etc. ist es nicht möglich, eine bestimmte Zeit anzugeben. Vor jedem Gebrauch prüfen, ob es für weiteren Verschleiß geeignet ist. Besondere Aufmerksamkeit sollte den Nähten und der Stelle, an der die Oberseite und die Sohle miteinander verbunden sind, gelten. Das Produkt behält seine Eigenschaften nur, wenn es ordnungsgemäß gepflegt wird. Bei Beschädigungen sollte das Produkt repariert werden kann, ohne den Schutz zu verringern. Schuh, die in einer Weise beschädigt sind, die den Grad des Schutzes verringert, z.B. verdrörrte Nähte, gerissene oder gerissene Sohle, müssen ersetzt werden. Bei sachgemäßer Lagerung beträgt die Gültigkeitsdauer des Produktes bis zu 5 Jahren ab Herstellungsdatum. Dieser Zeitraum kann durch die Durchführung der entsprechenden Tests verlängert werden.

Anti-Rutsch-Eigenschaften: Die Sicherheitsschuhe und Arbeitschuhe haben eine typische Sohle, die vor Rutschen schützt. Rutschschutz ist auf dem Code des Erzeugnisses näher beschrieben.

Antistatische Eigenschaften: Antistatische Schuhe werden dann empfohlen, wenn es notwendig ist, die Wahrscheinlichkeit der elektrostatischen Entladung zu verringern. Die elektrostatische Ladung wird auf solche Art und Weise abgeleitet, dass eine Funkentladung ausgeschlossen ist. Eine solche Entladung kann zu einer Entzündung von brennbaren Stoffen und Dämpfen führen. Es ist zu beachten, dass die antistatischen Schuhe einen vollständigen Schutz gegen Stromschlag nicht gewährleisten können, weil sie nur einen geringen elektrischen Widerstand zwischen dem Fuß und dem Fußboden einführen. Wenn die Gefahr eines Stromschlags nicht vollständig aufgehoben werden kann, sind weitere Maßnahmen zur Risikobewältigung notwendig. Es wird empfohlen, dass solche Maßnahmen sowie die nachfolgenden genannten Untersuchungen zu einem festen Bestandteil des Programms für Unfallverhütung am Arbeitsplatz werden. Es wird empfohlen, dass der elektrische Widerstand des Produktes, der die erwünschte antistatische Wirkung für die Gebrauchsdauer gewährleistet, 1.000 Megohm nicht unterschreitet. Für neue Produkte wurde die untere Grenze des elektrischen Widerstandes auf einem Niveau von 100 Kilohom bestimmt, um einen begrenzten Schutz gegen gefährliche elektrische Stromschläge oder Entflammung bei den Störungen von Elektrogeräten, die mit einer Spannung von 250 V arbeiten, zu gewährleisten. Die Benutzer sollten jedoch bewusst sein, dass die Schuhe unter Umständen keinen ausreichenden Schutz gewährleisten und weitere Schutzmaßnahmen getroffen werden müssen. Der elektrische Widerstand der Schuhe dieser Art kann sich durch Kratzen, Verunreinigungen oder Einfluss der Feuchtigkeit wesentlich ändern, die Schuhe verlieren ihre Eigenschaften in einer feuchten Umgebung. Somit ist es notwendig, dass die Schuhe ihre Aufgabe während der ganzen Gebrauchsdauer erfüllen und den Schutz gewährleisten. Den Benutzern wird es empfohlen, die innerbetrieblichen Untersuchungen des elektrischen Widerstandes festzulegen und die regelmäßig durchzuführen. Die Schuhe der Klasse I können die Masse absorbieren, die unter Umständen Zeit getrunken und feuchten Bedingungen in antistatischen Eigenschaften verlieren. Wenn die Schuhe unter solchen Bedingungen getragen werden, die die Verschmutzung der Sohle verursachen, wird empfohlen, dass der Benutzer die elektrischen Eigenschaften der Schuhe vor dem Eingang in den Gefahrenbereich prüfen. In den Bereichen, wo die antistatischen Schuhe getragen werden, wird empfohlen, dass der Widerstand des Fußbodens die Eigenschaften der Schuhe nicht beeinträchtigt. Es wird empfohlen, dass sich während der Nutzung der Schuhe keine isolierenden Elemente außer Wirkare zwischen der Schuhsohle und dem Fuß befinden. Wenn zwischen der Sohle und dem Fuß irgendeine Einlage eingesetzt wird, wird empfohlen, die elektrischen Eigenschaften der Sohle zu prüfen.

Werden die Schuhe mit herausnehmbaren Innenauskleidung geliefert von Hersteller/Bevollmächtigten, so sollte die Prüfung an der im Schuh platzierten Innenauskleidung durchgeführt werden. Die Schuhe sollten ausschließlich zusammen mit der Innenauskleidung getragen werden. Die Innenauskleidung darf nur durch eine vergleichbare vom Hersteller bzw. bevollmächtigten Vertreter des Herstellers der Originalschuhe mitgelieferte Innenauskleidung ersetzt werden. Werden die Schuhe ohne Innenauskleidung geliefert von Hersteller/Bevollmächtigten, so wird die Schuhprüfung ohne Innenauskleidung durchgeführt. Die Anbringung der Innenauskleidung kann sich auf die Schutzeigenschaften der Schuhe auswirken.

Der Zugang zur EU-Konformitätserklärung ist abrufbar unter support.rawpol.com.

Verliert die Anleutung ihre Gültigkeit wegen Änderungen von Rechtsvorschriften oder sonstigen Faktoren, muss ihre aktuelle Version heruntergeladen werden. Die aktuelle Version ist auf support.rawpol.com verfügbar. Diese Handbuchs ist die aktuellste Version des Handbuchs mit der Versionsnummer v. CSNF:109 gekennzeichnet, wobei CSNF der Bezeichner der Produktgruppe und 109 die laufende Versionnummer ist. Vor Beginn der Arbeiten, überprüfen Sie, ob die aktuellen/richtigen Gebrauchsanleitung gehalten, die Waren, bitte, um den Inhalt beziehen, und speichern Sie sie für das Leben der Pflanzenschutz. Wo Schüler sind in der Anleitung erklärt, sind nicht die gleichen wie am Produkt oder auf der Verpackung gekennzeichnet, bedeutet dies, dass Sie die Bedienungsanleitung für eine andere Charge oder andere Waren haben, in diesem Fall ist es notwendig, um die Person, die Sie benötigen, die Sendung zu erhalten, vorausgesetzt, dass Sie die Anweisungen oder den Hersteller oder einen autorisierten Vertreter des Herstellers wenden die haben. Es ist wichtig, um zu überprüfen, ob Sie die aktuellen/richtigen Anweisungen für den Einsatz für die eigenen Waren. Wenn der Besitzer nicht mehr aktuell ist oder falsch, im Besitz der Partie unbedingt erhalten die aktuellen/richtigen Gebrauchsanleitung und machen Sie sich mit dessen Inhalt. Versuchen Sie nicht, ohne zu wissen, die aktuellen/richtigen Anweisungen für die Arbeit!

DIE VOLLSTÄNDIGE GEBRAUCHSANWEISUNG KANN BEI BEGRIFF VERFÄLTFÄHIGKEIT WERDEN, DAMIT JEDE RUTZER IHREN INHALT KENNENLEHRT.

Im Falle jederder Zweifel ist die Arbeitschutzfachkraft, Hersteller oder bevollmächtigt Hersteller Vertreter derenklärung zu kontaktieren.

Legend der Markierung der Probe: [A] - Typenbezeichnung / Warencode des Herstellers, [B] - Normnummer, [C] - Schuhkategorie, [D] - Größe, [E] - Konformitätszeichen, [F] - Machen Sie sich mit der Gebrauchsanweisung vertraut, [G] - Produktionsdatum (Monat / Jahr), [H] - Herstellerkennzeichen, [I] - Name des Herstellers, [J] - das Konformitätszeichen von Ukraine, [K] - Zulassungsnummer des Herstellers.

Erklärung der gebrauchten Symbole: CODE - Typenbezeichnung/Warencode des Herstellers, CATEGORY - Schuhkategorie, NUMBER - Nummer des Artikels, SIZES - vorhandene Größen, PACKING - Produktionszahl in der kleinsten Verpackung/Anzahl in dem Karton, STANDARDS - Normen, COLOURS - verfügbare Farben, [E] - Partienummer, C - Konformitätszeichen, [K] - machen Sie sich mit der Gebrauchsanweisung vertraut, [I] - Herstellerkennzeichen, Ø - Produktlinie, G - online-Anleitung, H - Zulassung-Konformitätszeichen, E - das Konformitätszeichen

Erklärung der bei der Kennzeichnung von Schuhen verwendeten Symbole:	
A - Antistatische Schuhe	SRB - Rutschbeständigkeit auf glycerolbenzotrienen Stahlböden
AN - Knöchelschutz	SRC - Rutschbeständigkeit auf beiden Böden (SRA+SRB)
C - Leitende Sohle	HW - Das Ausstrichen kann immer noch in einigen Umgebungen
D - Isolierung der Sohle vor Kälte	WR - Beständigkeit des gesamten Schuhs gegen Wasserdurchlässigkeit und Wasseraufnahme
E - Energieabsorbierendes im Fersenbereich	ACU - Beständigkeit des Obermaterials gegen Wasserdurchlässigkeit und Absorbieren von Wasser
ESD - Beständigkeit Widerstand im Bereich zwischen 0,75 - 35 Mohm	WRU - Beständigkeit des Obermaterials gegen Wasserdurchlässigkeit und Absorbieren von Wasser
M - Beständigkeit der Sohle vor Dieselöl	W - Beständigkeit der Sohle vor Dieselöl
I - Isolierung der Sohle vor Wärme	ACU - Beständigkeit des Obermaterials gegen Wasserdurchlässigkeit und Absorbieren von Wasser
HRO - Beständigkeit der Sohle beim Kontakt mit heißem Untergrund bis 300 (±5°C)	SLip resistant - - Rutschfest
P - Schutz des Mittelfußes	Anti-slip area - - Anti-Rutsch-Bereich
M - Beständigkeit des Schuhs gegen Durchstechen mit einer Kraft von 1100 N	Oil resistant - - Ölbeständigkeit
SRA - Rutschbeständigkeit auf Keramikböden, die mit Natriumlaurylsulfat (NaLS) beschichtet sind	Antistatic - - Antistatische
	Hydrocarbons resistance - Beständigkeit gegen Kohlenwasserstoffe

Kategorien von Sicherheitsschuhen mit den am Häufigsten vorkommenden Anspruchs kombinationen entsprechend der Norm EN ISO 20345:2011:

S8 = Basisseigenschaften (unter 200 Joule beständig gegen Schläge mit einer Energie von 200 J sowie gegen Quetschungen 15kN - Zerschützung)	S4 = Basisseigenschaften + geschlossener Fersenbereich + antistatische Eigenschaften + Energieaufnahme im Fersenbereich
S1 = Basisseigenschaften + geschlossener Fersenbereich + antistatische Eigenschaften + Energieaufnahme im Fersenbereich + Beständigkeit der Sohle vor Dieselöl	S5 = Wie bei S4 + Beständigkeit Unterseite des Schuhs gegen Durchstechen + geförmte Sohle.
S2 = Wie bei S1 + Beständigkeit der Obermaterialien gegen Wasser-durchlässigkeit und Absorbieren von Wasser	SBH = Bezeichnung der Kategorie der sicheren Hybridschuhe.
S3 = Wie bei S2 + Beständigkeit Unterseite des Schuhs gegen Durchstechen + geförmte Sohle.	

Kategorien von Arbeitsschuhen mit den am Häufigsten vorkommenden Anspruchs kombinationen entsprechend der Norm EN ISO 20347:2012:

O8 = Basisseigenschaften (Schutz des Fußes vor oberflächlichen mechanischen Verletzungen, z.B. Kratzer, Abschürfung)	O4 = Basisseigenschaften + geschlossener Fersenbereich + antistatische Eigenschaften + Energieaufnahme im Fersenbereich.
O1 = Basisseigenschaften + geschützter Fersenbereich + Antistatische Eigenschaften + Energieabsorbierendes im Fersenbereich.	O5 = Wie bei O4 + Beständigkeit Unterseite des Schuhs gegen Durchstechen + geförmte Sohle.
O2 = Wie bei O1 + Beständigkeit des Obermaterials gegen Wasser-durchlässigkeit und Absorbieren von Wasser.	OBH = Bezeichnung der Kategorie der professionellen Hybridschuhe.
O3 = Wie bei O2 + Beständigkeit Unterseite des Schuhs gegen Durchstechen + geförmte Sohle.	

Diese Anleitung gilt als fester Bestandteil der Verpackung und zugleich als ihre Kennzeichnung. Gemäß der Verordnung (EU) 2016/425 Des Europäischen Parlaments und des Rates AT:17.Ziff. 1 müssen alle Kennzeichnungen nicht auf dem Produkt angebracht werden. Die Beschre-

EN INSTRUCTION AND INFORMATION FOR THE USERS
Manufacturer: RAW-POL STEFAŃSKI SPÓŁKA KOMANDYTOWO-AKCYJNA, Julianów 50, 96-200 Julianów, Poland.
This product belongs to the general product category of PPE, specified in the Regulation (EU) 2016/425 of the European Parliament and of the Council and it meets the requirements of the Regulation. It has been assigned to the II category.
Standards: Product complies with EN ISO 20345:2011 „Personal protective equipment. Safety footwear”.
The notified body: CTC, 4, rue Hermann Frenkel, 69367 Lyon Cedex 07, France; Number of the notified body: 0075.
Product/Description: Safety shoes according to the category specified in CATEGORY field and located on the product. The detailed characteristics of the product is provided in the instruction for use.
Destination, usage and servicing: This product is dedicated to the user protection and it protects against specified hazards, according to the category which is approved on the basis of standards requirements that are met. The protection level is compatible with the category located on the product. Meaning of particular symbols used in footwear category is specified in the further part of the instruction and at rawpol.com. The protection level has been obtained on the basis of tests carried out according to conditions described in the norms to which they apply. The footwear of protection level II is intended for use in the environment where the risk assessment is a given work environment. It is intended for use in accordance with the safety level (professional protective footwear according to EN 20347 and safe footwear according to EN 20345); protect the user against injuries which are likely to occur during work – provided with the steel big toe protector designed in this manner that ensures protection against stroke in testing with the force of at least 200 J and against compression in testing under compressive load of at least 15 kN in accordance with the safety level safe footwear according to EN 20345. The product provides protection against the above risks and it is intended for use in the environment where they occur. Please always carry out a risk assessment in a given work environment to determine whether the product provides protection against all risks available in this environment. It should be borne in mind that no personal protection equipment means assure the complete protection, therefore the work must be conducted with due care. During work the attention should be paid to the maintenance of the protective qualities and functions. The loss of the protective properties means that the product is worn out.
The materials used for the shoes should not be harmful to the health of the user. The materials should not contain any substances contained in the product or being the product component may be an allergen, e.g. cotton, leather, metal elements, latex, pigments etc. The highly sensitive individuals should test the product prior to its use or consult the physician.
To insert the shoe is recommended to use spoons footwear. If present, the assumption must be shoelaces shoes and fasten buckles (to keep the foot firmly embedded in the shoe, but at the same time not too compressed), and removing shoes before they untie/detach to easily remove the foot. When removing shoes, do not step on the second shoe level and the second shoe level may be damaged.
Detailed information on the relevant parts of additional and replacement parts (if any are available) can be obtained from the manufacturer or his authorized representative.

Restrictions: It is to be warned against the use of the product inconsistently with the intended use, instruction recommendations and in conditions of high risk (where the PPE of III category are appropriate). If the properties does not state otherwise, the use of shoes at extremely low or high temperatures may adversely affect the durability. All kinds of modifications that may decrease the safety level are prohibited.
Concerning the penetration resistance footwear (the penetration resistance footwear has the penetration resistance index): The penetration resistance of this footwear has been measured in the laboratory using a truncated nail of diameter 4.5 mm and a force of 1100 N. Higher forces or nails of smaller diameter will increase the risk of penetration occurring. In such circumstances alternative preventative measures should be considered. Two generic types of penetration resistant insert are currently available in PPE footwear category. These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.
Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.
Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.
Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.
Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size: The product should be of the appropriate size which should be established by fitting prior to work commencement. The size of the product is stated on the product. The available extent of sizes is stated in SIZES field.

Storage: The product should be stored at the appropriate temperature, in dry and well ventilated place. Too high humidity of air, too high or low temperature or intense light can adversely impact the product quality. Do not weigh down with heavy objects. Keep far from sharp objects. The internal part of the shoe should remain dry. Manufacturer accepts no liability for the quality of the product stored contrary to the instructions. This may result in a lowering of the footwear protection level.

Packing type: It is recommended to distribute (including transport) this product in cardboard boxes. Loading, transport and unloading should take place in conditions protecting against getting wet, dirty and damaged.

Maintenance, cleaning and disinfection: It is recommended to apply to the upper part of the footwear the substances intended for the maintenance of the given material (e.g. leather, aerosols, pastes, aerosols, etc.). These are metal types and those from non-metal materials. Both types meet the minimum requirements for penetration resistance of the standard marked on this footwear but each has different additional advantages or disadvantages including the following:
Metal: is less affected by the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness) but due to shoemaking limitations does not cover the entire lower area of the shoe.
Non-metal – May be lighter, more flexible and provide greater coverage area when compared with metal but the penetration resistance may vary more depending on the shape of the sharp object/hazard (i.e. diameter, geometry, sharpness).

Before use check type of the insert in the footwear in the product card or at rawpol.com or ask the person who provide you footwear. For more information about the type of penetration resistant insert provided in your footwear please contact the manufacturer or the authorised representative of the manufacturer detailed on these instructions.

Size:

